



California Faucets®

Coronado™

WIDESPREAD LAVATORY FAUCET

5502


Features

- Available in 28 finishes including 13 PVD Finishes
- All brass construction
- 5" spout center to center
- 1/4" turn ceramic disc cartridge(s)
- Flexible braided hoses for ease of installation
- \varnothing 1-1/4" all brass touch style pip up drain assembly
- 1.2gpm (4.5 L/min) max flow rate

Codes/Standards Applicable

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61 & NSF/ANSI 372
- CEC / DOE
- EPA WaterSense High Efficiency Lavatory
- Commonwealth of MA
- ADA compliant

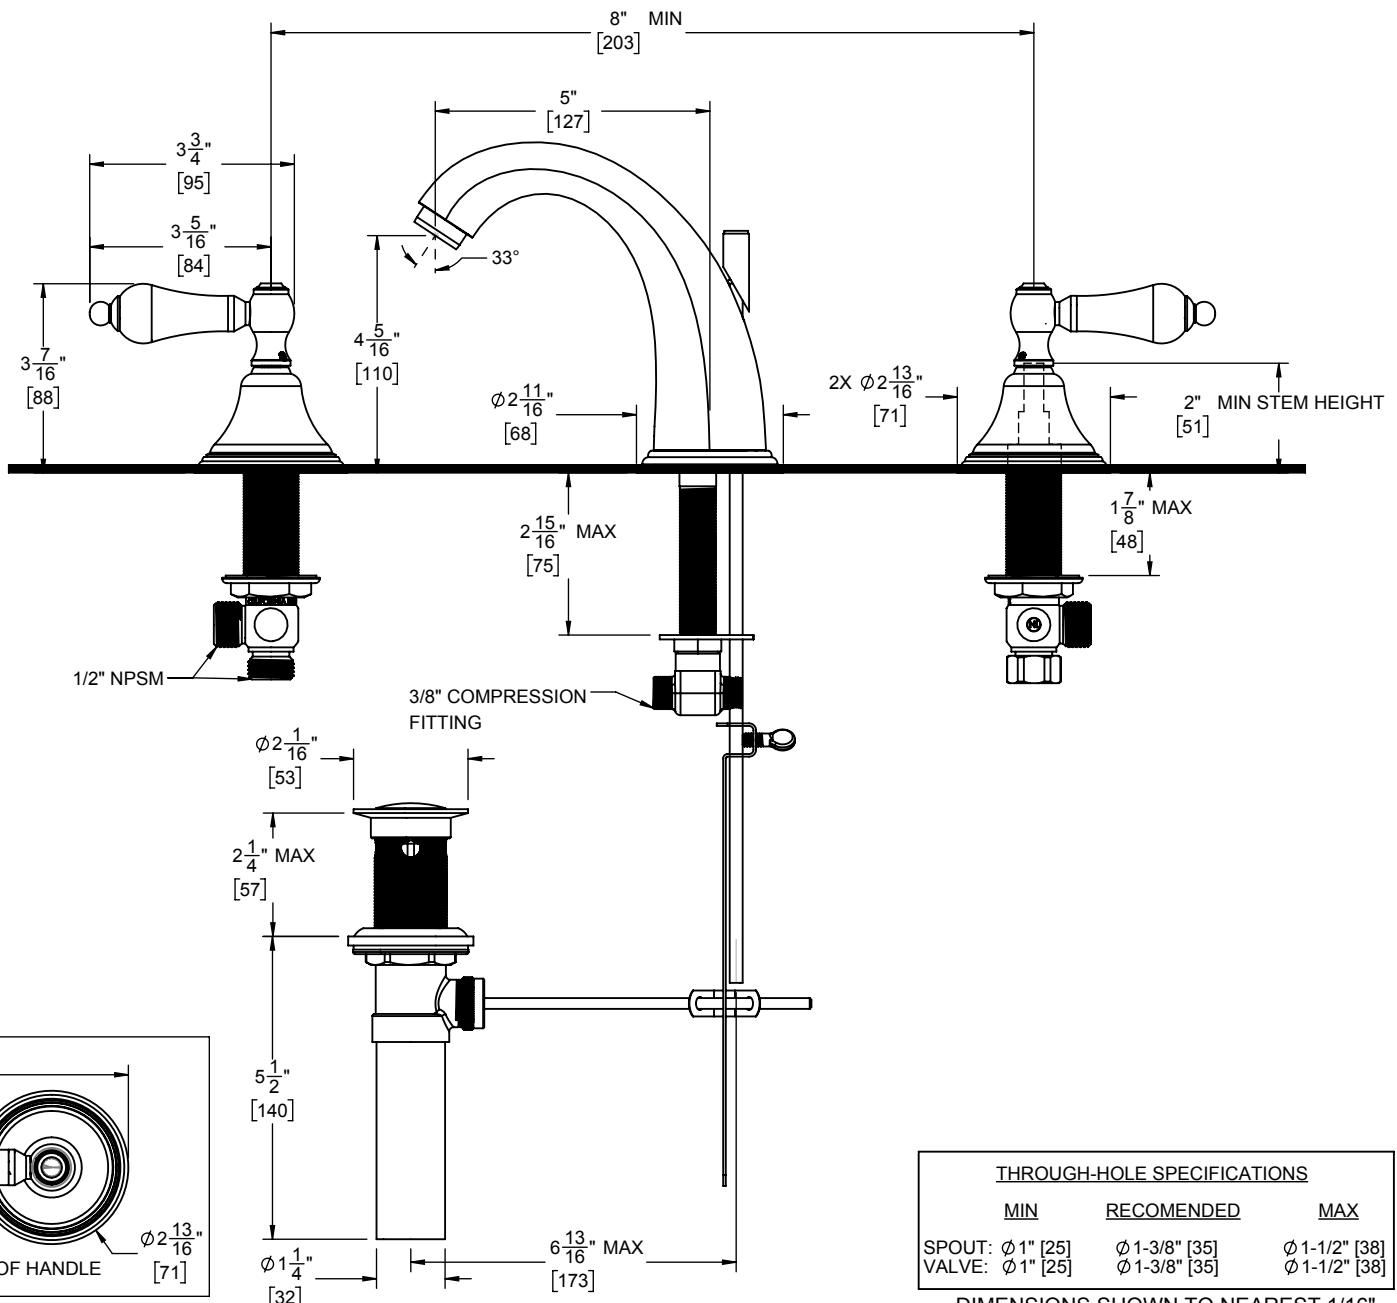

THROUGH-HOLE SPECIFICATIONS			
	MIN	RECOMENDED	MAX
SPOUT:	\varnothing 1" [25]	\varnothing 1-3/8" [35]	\varnothing 1-1/2" [38]
VALVE:	\varnothing 1" [25]	\varnothing 1-3/8" [35]	\varnothing 1-1/2" [38]

DIMENSIONS SHOWN TO NEAREST 1/16"
[DIMENSIONS SHOWN TO NEAREST 1mm]

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE