





Features

- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Max flow rate: 16 gpm (60.6 L/min)
- Includes rough in valves
- 1/4 turn ceramic disc cartridge(s)


Codes/Standards

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- Commonwealth of MA
- ADA compliant

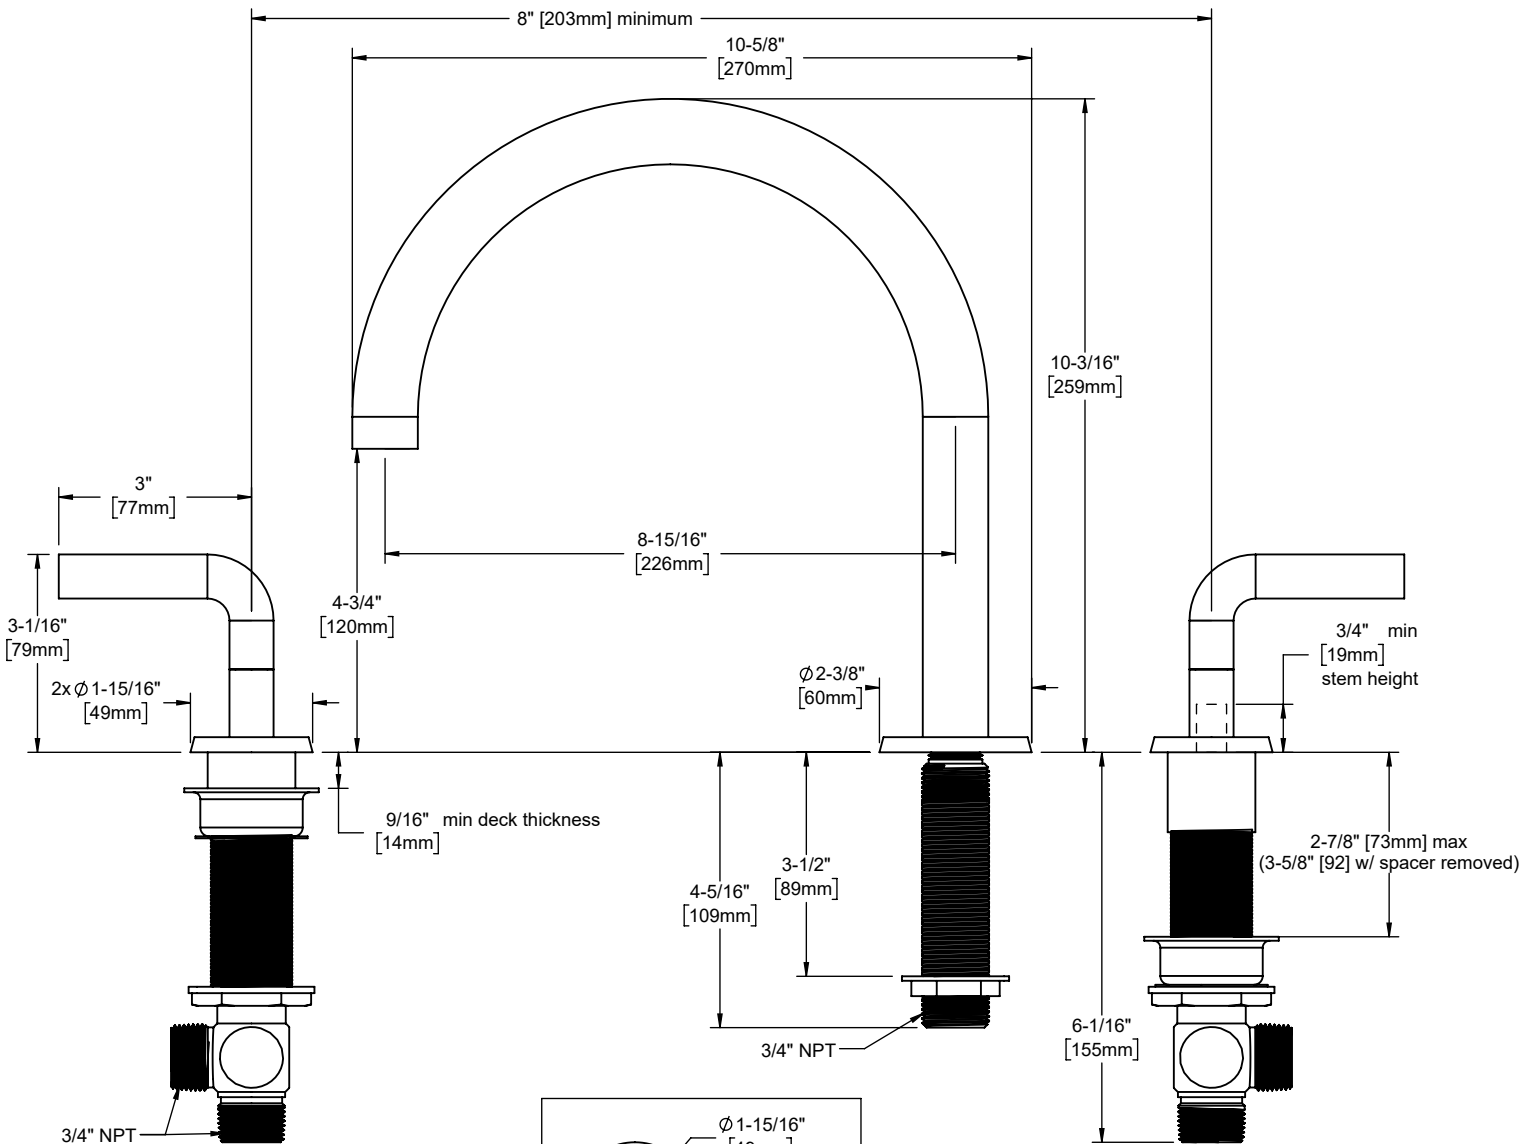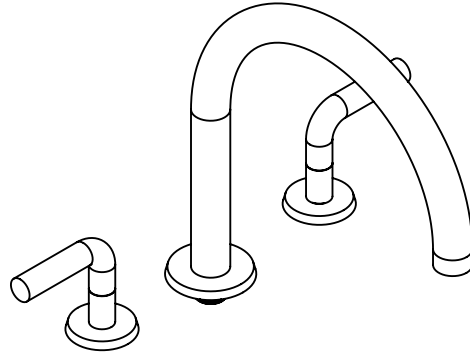

Through-hole Specifications			
	Min	Recommended	Max
Spout:	Ø 1-1/16" [27mm]	Ø 1-3/8" [35mm]	Ø 1-1/2" [38mm]
Valve:	Ø 1-3/8" [35mm]	Ø 1-3/8" [35mm]	Ø 1-1/2" [38mm]



Dimensions are inches, rounded to 1/16" [Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice