# NEWPORT BRASS

# ASTAIRE

**Prep Sink / Bar Faucet** 

### Features

- Solid brass construction
- Forged brass body with integral rotating spout and handles
- Quarter-turn washerless ceramic disc valve cartridges
- ADA compliant traditional lever handles
- Rotating spout assembly with integral supply hoses
- 10" (25.4 cm) spout height at outlet
- 5-1/4" (13.3 cm) spout reach (c-c)
- For single hole configurations
- 1.5 gallons (5.7 liters) per minute maximum flow rate

### **Codes / Standards Compliance**

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- IAPMO/cUPC
- IPC
- NSF 61
- ADA
- ICC/ANSI A117.1
- Energy Policy Act of 1992
- All applicable US Federal and State material regulations



#### **Colors / Finishes**

- 10B: Oil Rubbed Bronze
- 15: Polished Nickel
- 15S: Satin Nickel PVD
- 26: Polished Chrome
- Other: Refer to the Newport Brass catalog for additional color/finish options.

#### **Specified Model**


Model	Description	Colors   Finishes
1668	Two-Handle Prep Sink / Bar Faucet	□ 10B □ 15 □ 15S □ 26 □ Other


#### **Product Specification**: Add "Color / Finish" suffix to Model number, below.

The Two-Handle Prep Sink / Bar Faucet shall be made of solid brass construction. Faucet shall feature a forged brass body incorporating quarter-turn washerless ceramic disc valve cartridges. Faucet shall have a 1.5 gallon (5.7 liter) per minute maximum flow rate. Product shall accommodate single hole configurations. Product shall incorporate a 10" (25.4 cm) spout height at outlet and a 5-1/4" (13.3 cm) spout reach (c-c). Faucet shall incorporate ADA compliant traditional lever handles. Prep Sink / Bar Faucet shall be Newport Brass Model 1668/\_\_\_\_\_.

## 1668

### **PRODUCT DIMENSIONS** (Units are in inches)

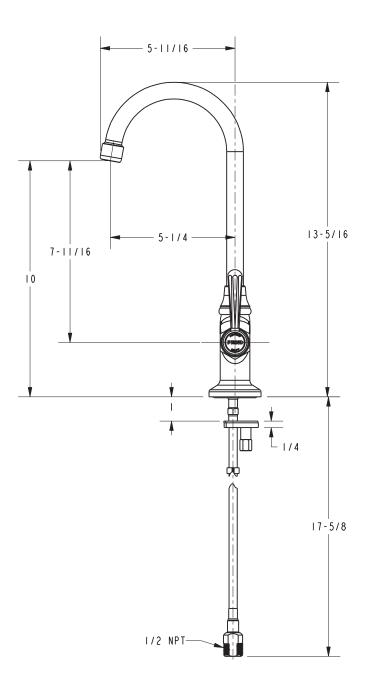

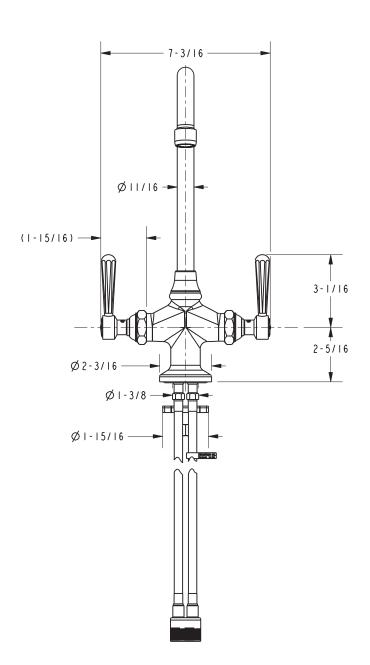

# Astaire Prep Sink / Bar Faucet 1668



t: 949.417.5207 | www.newportbrass.com ©2016 Brasstech, Inc.

Page 2 of 2 Spec\_1668\_d\_4.16