MS974224CEF(G)

Eco Guinevere® One-Piece Toilet, 1.28GPF

FEATURES

- Tornado Flush™ system, high efficiency (1.28GPF/4.8LPF)
- Optional CeFiONtect® ceramic glaze CeFiONtect glaze prevents debris, mold and bacteria from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning.
- Universal Height
- One-piece decorative high profile skirted toilet with tank
- Elongated front bowl with SoftClose® seat (SS224)
- Chrome trip lever
- 12" Unifit rough-in (included), less supply

MODELS

- MS974224CEFG
 With CeFiONtect ceramic glaze, SS224 SoftClose seat included
- MS974214CEF Less CeFiONtect, SS224 SoftClose seat included
- TSU03W.10R 10" Unifit rough-in (sold separately)
- TSU03W.14R 14" Unifit rough-in (sold separately)

COLORS/FINISHES

Standard

#01 Cotton

#03 Bone

#11 Colonial White

#12 Sedona Beige

#51 Ebony (not available in CeFiONtect)

PRODUCT SPECIFICATION

The one-piece high efficiency Tornado Flush system toilet shall be 1.28GPF/4.8LPF. Toilet shall have optional CeFiONtect ceramic glaze and be at Universal Height. Toilet shall be of skirted design with high-profile tank, elongated front bowl with SoftClose seat and Chrome trip lever. Toilet shall be TOTO Model MS974224CEF_____.





CeFiONtect



Tornado Flush

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)







Eco Guinevere® One-Piece Toilet, 1.28GPF

SPECIFICATIONS

Water Use
Flush System
Min. Water Pressure
Water Surface
1.28 GPF/4.8LPF
Tornado Flush™
8 psi (static)
7-7/8" x 9-7/8"

Trap Diameter 2-1/8"

• Rough-in 12" (Standard), 10", 14"

• Trap Seal 2-3/16"

• Warranty One Year Limited Warranty

Material Vitreous china

Shipping Weight 120 lbs.


• Shipping Dimensions 32" L X 20"W X 17-3/4" H¹

X 28-3/4" H²


INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

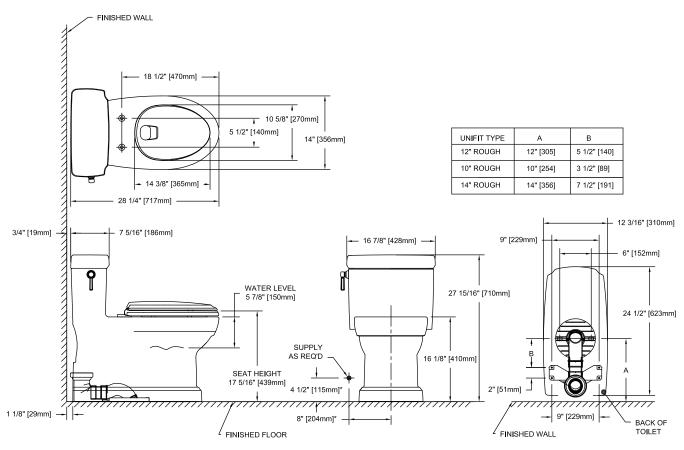

*SUGGESTED DIMENSIONS



These dimensions and specifications are subject to change without notice