
INSTALLATION INSTRUCTIONS

CUBIX[®] Deluxe Wall Bar Part #'s: 8724, 8730, 8737





PARTS

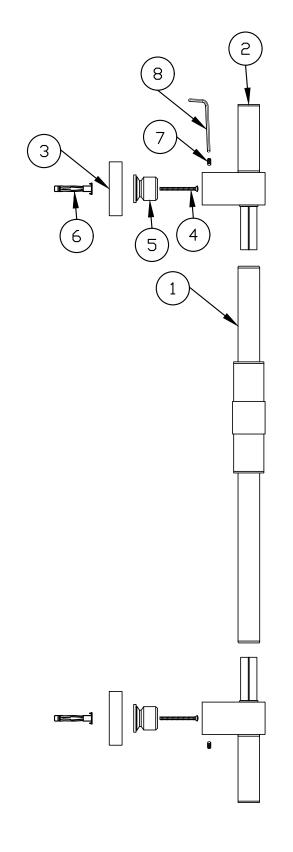

	COMPONENT PARTS	QTY.
1	WALL BAR WITH SLIDER	1
2	WALL POST	2
3	ESCUTCHEON	2
4	SCREW	2
5	MOUNTING BRACKET	2
6	WALL ANCHOR	2
7	SET SCREW	2
8	ALLEN KEY	1

CREATED 11.08.2018

PRE-INSTALLATION

- 1. Determine convenient heights for wall bar placement.
- 2. If not pre-installed, slide slider onto bar by loosening handle, once in place slightly tighten handle.
- 3. Place handle of screwdriver into handshower slider and turn multiple times ensure smooth operation. Handle should move 135 degrees. (If after several attempts it appears too tight remove flat head screw located under arm of holder, give one complete rotation and replace screw).

INSTALLATION

- 1. Insert top and bottom end posts on to bar.
- 2. Measure center to center of mounting bracket located in rear of end post.
- 3. Mark wall for single hole installation in desired position.
- 4. Drill one 1/4" hole for top post and one 1/4" hole for bottom post.
- 5. Remove mounting brackets from rear of posts using allen key, place anchor in hole, screw through post into anchor snug, but not fully tighten yet.
- 6. Slide escutcheons over rear of posts beyond set screws.
- 7. Place wall bar into position.
- 8. Tighten set screws and slide escutcheons to wall.

IF NEEDS ADJUSTING

- 1. If adjusts are needed after wall bar is placed on the mounting brackets, the brackets can be moved slightly for any minor adjustments.
- 2. Once wall bar is properly adjusted, remove wall bar and tighten screws.
- 3. Slide escutcheons over rear of posts beyond set screws
- 4. Place wall bar back into position.
- 5. Tighten set screws and slide escutcheons to wall.

Over Fifty Years of Excellence Proud to be an American Company



JACLO Confidence from start to finish

CARE INSTRUCTIONS

In order to maintain the high quality finish of JACLO products, please adhere to the following product care instructions:

Cleaning JACLO products: For routine cleaning, simply use a soft damp cloth and common household soap, then rinse and dry. Proper care of your product is important because most water contains calcium that deposits on surfaces, forming unpleasant spots. This can be avoided by routine cleaning and drying after every use. Use only mild soap detergents. JACLO products may be periodically waxed with non abrasive compounds, such as Flitz[®] faucet wax.

WARRANTY

Residential Warranty: Your new plumbing fixture is warrantied by **JACLO INDUSTRIES**, 129 Dermody Street, Cranford, NJ 07016. This warranty is extended to original consumer purchasers only. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

The product (including the finish on the product but excluding any custom finishes and any installation hardware not supplied by JACLO) is warranted to be free from defects in material or workmanship under normal use and service for the lifetime* of the fixture, so long as the original consumer purchaser owns it. JACLO's sole obligation under this or any other warranty is limited to repairing or replacing at JACLO's option, without labor, any part or parts of the fixture which fail to conform to such warranty.

JACLO WILL NOT BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES CAUSED BY A BREACH OF THIS OR ANY OTHER WARRANTY.

Some states do not allow the exclusion of limitation of incidental or consequential damages, so the above limitation may not apply to you.

To secure warranty performance, the original consumer purchaser must have the fixture properly and professionally installed in accordance with all codes and installation instructions. Never use abrasive cleaners, bleach, disinfectants or cleaning products containing alcohol, ammonia, hydrochloric or phosphoric acids as they will damage the product finish.

Please note: Your product warranty may not be valid if the above cleaning guidelines are not followed.

Items and actions that will void the JACLO warranty are:

- Abuse, misuse, neglect and accidental damage
- Improper cleaning, care and maintenance of the fixture
- Alteration of the fixture in any way including removal of a flow regulator/restrictor

All warranty claims must be made in accordance with the JACLO return policy (see below).

JACLO does not authorize any distributor, retailer or other person to modify this warranty or assume any liability on its behalf with respect to it. Any question regarding the operation of warranty should be addressed to JACLO's warranty department.

*Due to the unpredictable environment, all kitchen drains, strainers and garbage disposal flanges are warrantied for the period of one year from date of purchase from an authorized JACLO dealer.

Un-lacquered Brass (ULB) is a living finish and is excluded from any finish warranty.

<u>Commercial Warranty</u>: JACLO offers the above warranty for a period of one year from date of purchase to purchasers of products for industrial, commercial, business and all non-private residential uses.

